
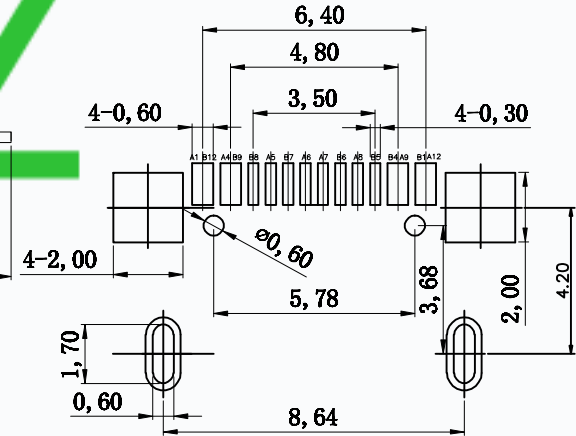


CMTDDZ

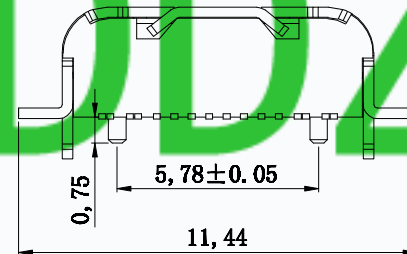

RECOMMENDED PCB LAYOUT
TOL: (±0.05)

1. 材料

- A. 主体: LCP, 黑色, 白色, UL 94-V0;
- B. 端子: 铜合金, 电镀刷金;
- C. 外壳: 不锈钢, 镀全铬;

2. 主要特性

- A. 电压等级: 20V AC;
- B. 电流: 3A;
- C. 工作温度: -40°C~85°C;

3. 电气要求:

- A. 接触电阻: 40mΩ Max. (初始), 50mΩ Max. (最后);
- B. 电压: 100V AC 1分钟;
- C. 绝缘电阻: 100MΩ min. DC 500V;

4. 机械性能:

- A. 插入力: 5~20N. (从1~10,000次);
- B. 拔出力: 8~20N. (从1~1,000次);
- 6~20N. (从1,001~10,000次);
- C. 耐久性寿命: 5,000次;

东莞市田都电子有限公司
DONGGUAN TIANDU ELECTRONICS CO.,LTD

.X: ±0.25		∠: ±1°		APP.	DWG NO.
.XX: ±0.15		.X: ±0.5°			
.XXX: ±0.05		.XX: ±0.02°		CHK.	TITLE
UNIT	MM				DGN.
SCALE	1:1			DEN.	SU
REV.	A0	SHEET:	1/1	DRW.	SU