
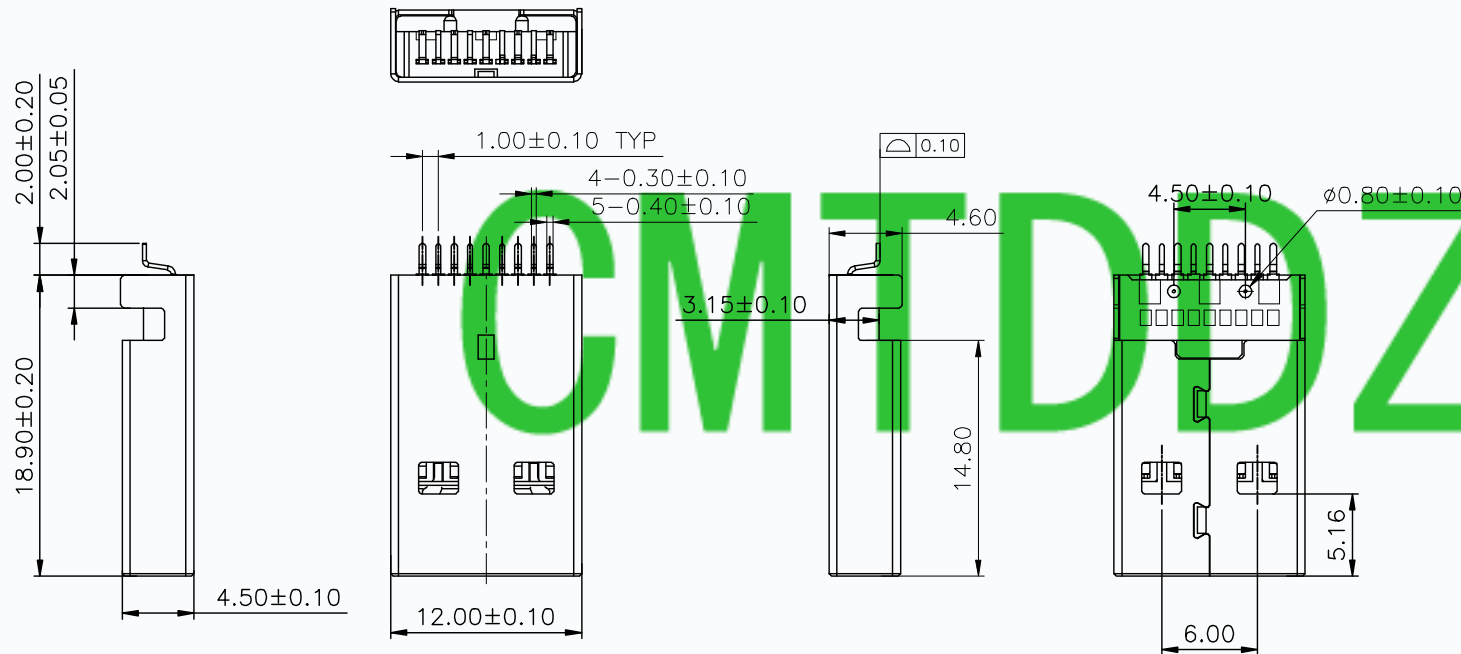



REV.	ECN NO.	DESCRIPTION	DRAW	CHECK	APPD.	DATE
A0	ECN130803015	新发行		—	—	13-08-03
A1	ECN151221002	修改图面与实物相符				15-12-21

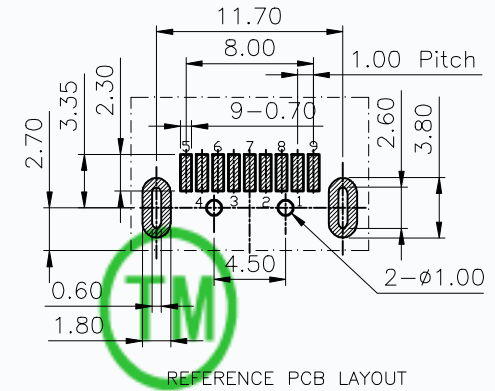

料号备注：
T10-3M015MXXTXXR

"12"半金引脚G/F "00"—LCP
 "15"半金引脚15U"
 "16"半金引脚30U"

SPECIFICATIONS:
 Contact current Rating:
 1.8 Amperes for pin1&pin4.
 0.25 Amperes other contacts
 Dielectric Withstanding Voltage:AC 100V(RMS)
 Insulation resistance:100Megohms Minimum.
 Contact Resistance:
 30mΩ Max for pin1&pin4
 50mΩ Max for other contacts
 Mechanical Characteristics:
 Mating Force:35 Newtons.Maximum
 Unmating Force:10 Newtons.Minimum.
 8N Min After Durability
MATERIAL:
 Housing: LCP+30%GF 94V-0 COLOR:BLUE
 Contact: copper alloy(T=0.25mm)
 Shell: SPCC
PLATING:
 Contact: Au Plated on contact area
 Tin Plated on solder area
 Nickel underplating over all
 Shell: Nickel Plated
 operating Temperature:-55iäto+85iä



Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	StdA_SSRX-
6	StdA_SSRX+
7	GND_DRAIN
8	StdA_SSTX-
9	StdA_SSTX+
Shell	Shield

东莞市田都电子有限公司
 DongGuan TianDu Electronics Co.,Ltd

UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL	日期	品名规格
METRIC	0.30	制图 xubin	2012.01.02	USB AM 3.0 SMT L=3.2 直脚4.6
.X	+/-	审核		
.XX	+/-	核准		料号
FRACTIONS +/-	2.00'	文件位置		SEE TABLE
ANGLES +/-		字库	工程图号:	版本
DIMENSIONS (METRIC) (MM)		ANGLE OF PROJECTION		A4 TDU-USBAM-015 A1
		比例 1 : 1 状态码 A 页数 1 OF 1		