


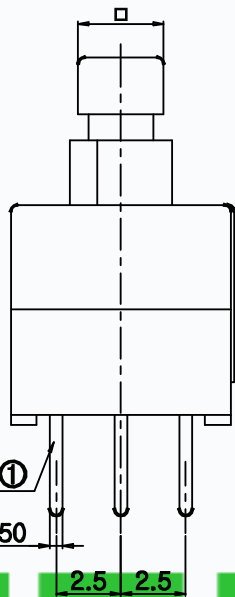


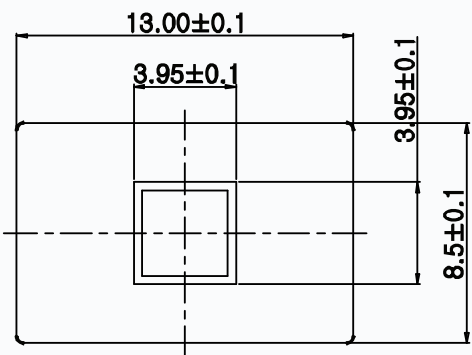

CAD FILE:

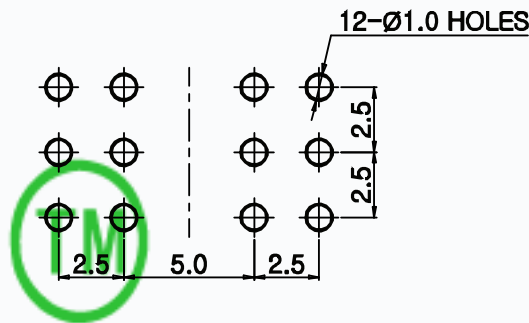

TERMINAL NO ①

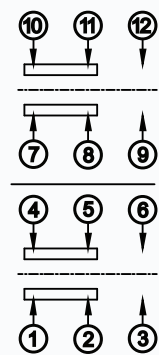

Circuit diagram

PCB Dimension


CMTDDZ

OPERATING MODEL:

SELF-LOCK:T5-85F045D-L
Non-LOCK:T5-85F045D-NL

SPECIFICATIONS

Rating	0.1A 30V DC
CIRCUIT	4C-2P
Timing	NON-SHORTING
Travel	FULL:2.5mm
	LOCK:1.5mm
Operating Force	230gf ± 50gf
Operating Life	10.000 cycles

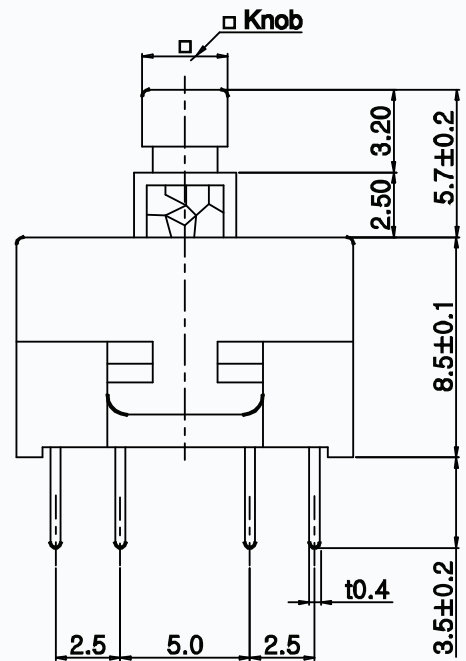

NO.	PARTS	MATERIALS	Q'TY	FINISH
8				
7	CAM STICK	SUS	1	NATURAL
6	SPRING	SUS	1	NATURAL
5	CONTACT CLIP	PHOSPHOR BRONZE	4	Ag PLATED
4	TERMINAL	BRASS	12	Ag PLATED
3	CASE	PA66	1	WHITE
2	COVER	PA66	1	BLACK
1	KNOB	POM	1	GREEN

TOLERANCE UNLESS SPECIFIED		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN TIANDU ELECTRONICS CO.,LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN TIANDU ELECTRONICS CO., LTD		DESCRIPTIONS OF REVISION		APPD.	
WITHIN 1.5mm : ±0.1mm							
OVER 1.5mm : ±0.2mm							
TITLE : VERTICAL SLIDE SWITCH			UNIT : mm	DRWG NO.: CMTDDZ-T5-85F045D-00			
MODEL: SEE TABLE			SCALE: 3:1	DWN.	ERIC	2013-6-17	
CMTDDZ 东莞市田都电子有限公司 DONGGUAN TIANDU ELECTRONICS CO.,LTD.			CHK'D		MAIKO	2013-6-17	
			APPD.		Coco	2013-6-17	