
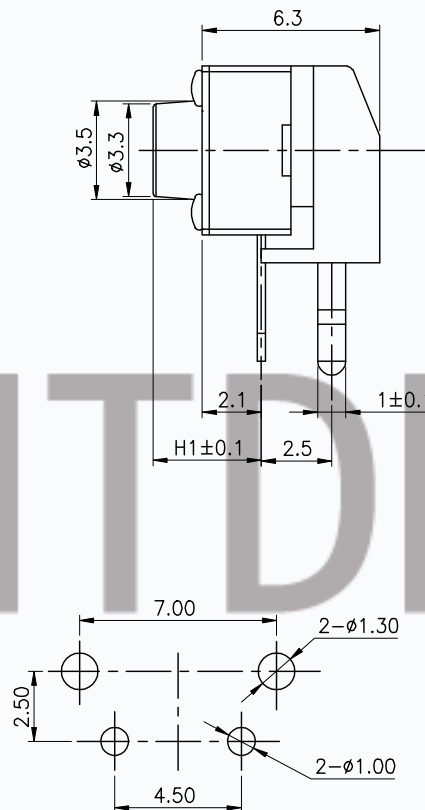


RoHS

REV.	ECN NO.	REVISED	DATE

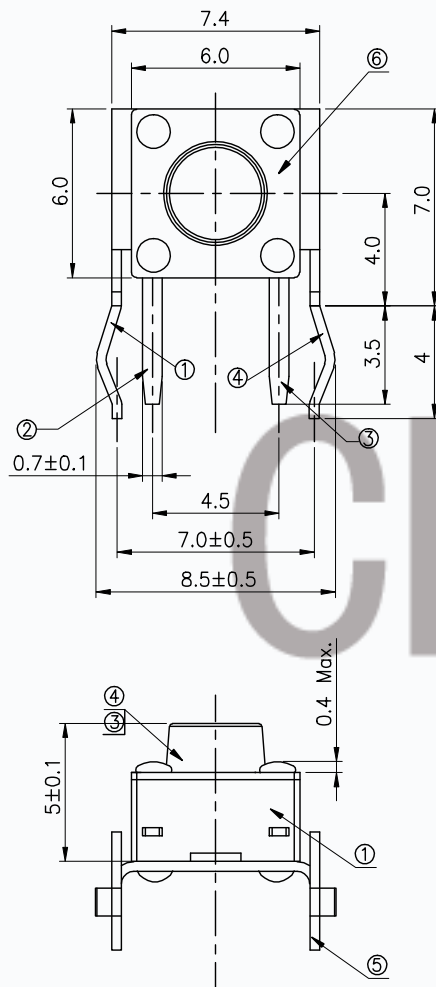

Recommend PCB Layout
PCB Top View
Tolerance: ±0.05mm
Recommend PCB Thickness: 1.6mm

NOTES:

1.ELECTCAL CHARACTERISTICS:

1-1.CONTACT CURRENT RATING: 50mA.

1-2.CONTACT VOLTAGE RATING: 12V. DC.

1-3.CONTACT RESISTANCE: 100mΩ MAX.

1-4.DIELECTRIC WITHSTANDING VOLTAGE: 500V. AC. for 1 MINUTE

1-5.INSULATION RESISTANCE: 100 MΩ MIN.AT 100V. DC

2.MECHANICAL CHARACTERISTICS:


2-1.DURABILITY: 500000 CYCLES.

2-2.PUSH FORCE: 200gf±50gf.

3.ENVIRENMENT CHARACTERISTICS:

3-1.OPERATING TEMPERATURE: -20℃~+70℃

3-2.HUMIDTY: 45-85% RH.

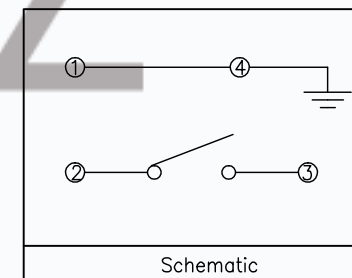UNLESS OTHERWISE
SPECIFIED TOLERANCES

SCALE: 1:1

SIZE: A4

VIEW: ③ ④

MODEL TYPE:

UNIT: mm

REV.: A/0

OBJECT: YCG

TACT SWITCH

DECIMALS: ANGLES:

X :±0.30 X :±2'

X.X :±0.20 X.X :±1

X.XX :±0.10

X.XXX :±0.05

DSND

DATE

CHKD

DATE

APVD

DATE

PART NO:

T6-6060YM

DWN. NO.

WEIGHT:

g

CMTDDZ 东莞市田都科技有限公司
Dongguan TianDu Technology Co. Ltd.

6	COVER		1	Brass t=0.25	CuSn plating
5	SHEEL		1	SPCC t=0.4	MATTE Tin plating
4	BUTTON		1	PPA	BLACK
3	SPRING		1	Ag. STS301 Overlay	Ag plating
2	CONTACT		1	Brass t=0.30	Ag plating
1	HOUSING		1	PPA	BLACK
NO.	PART NAME	TER'NO.	Q'TY	MATERIAL	PLATING & COLOR