



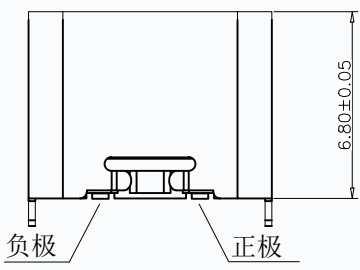
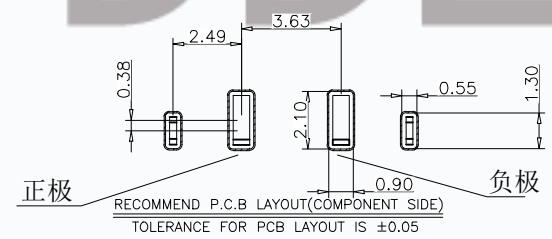
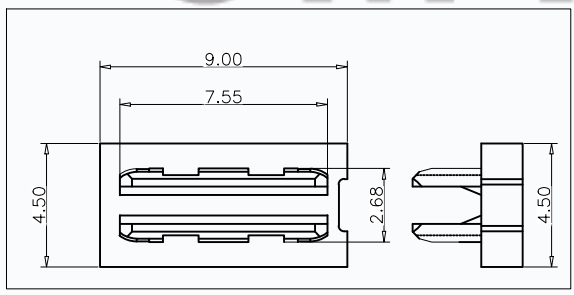

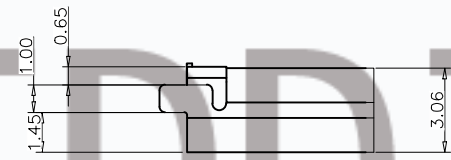


REV.	ECN	DESCRIPTION	MDF'D	DATE
		新订图面		



备注 (NOTE):
 1材质:
 1.1胶芯: LCP UL94 V-0
 1.2端子: C2680, T=0.2mm; 镍底, 镀金
 1.3外壳: 不锈钢201-H 表面镀镍
 2. 电气特性:
 2.1. 接触区: 接触电阻40mΩ Max, 允许10mΩ变化量, 测试条件: 20mv, 100mA下测量.
 2.2. 接触电流: 3A VBUS引脚; 1.25A用于GND引脚; 其他引脚为0.25A.
 2.3. 额定电压: 5V.
 2.4. 耐电电压: 100VAC.
 2.5. 绝缘电阻: 至少100兆欧 .
 3. 机械性能:
 3.1. 插入力: 0.5-2.0Kg
 3.2. 拔出力: 0.6-2.04Kg
 3.3. 插拔次数: 5000次.
 4. 工作环境: -20℃ to +85℃.



USB TYPE C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
		B12	GND
		B9	VBUS
A5	CC1		
		B5	CC2
A9	VBUS		
A12	GND		

TABLE:

NO	PART	Q'TY	Material
1	SHELL	1	ZINC ALLOY, NI30u"Min PLATED
2	CONTACT	6	C2680, TIN80u"/Au1u"/NI30u" PLATED
3	IMD HOUSING	1	LCP UL94 V-0 BLACK
4	CAP	1	LCP UL94 V-0 BLACK
5	WATERPROOF RING	1	SILICONE UL94 V-0 BLACK

CMTDDZ 东莞市田都科技有限公司 Dongguan TianDu Technology Co. Ltd.		页码 (SHEET)	1	单位 (UNIT): MM
		版本 (REV)	A1	比例 (SCALE) 1:1
品名 (ITEM NO)	TYPE-C2P立贴6.8	日期 (DATE)	2022.9.3	未注公差 TOLERANCE UNSPECIFIED X.X ±0.20 X.XX ±0.15 X.XXX ±0.10 X° ±5° X.X° ±2°
料号 (PART NO)	T11-02LS01-6.8H	设计 (DESIGN)	ERIC	
图号 (DWG NO)		审核 (CHECKED)		
		核准 (APPROVED)		