

序号	名称	材料
1	底座	PA9T(UL94-0)
2	接触件	磷青铜(镀锡)
3	焊片	磷青铜(镀锡)






版次	日期	内容
A1	08-05-01	

Electrical properties:

- 1、Current rating: 3AC\DC (AWG #22)
- 2、Voltage rating: 250V AC\DC
- 3、Temperature range: -25℃ to +85℃
- 4、Contact resistance: initial value/20mI, max
- 5、Insulation resistance: 1000MΩ, min
- 6、Withstanding voltage: 3500V AC/ minute
- 7、Applicable wire: AWG #26 to #22

Environmental controls:

- 1、Banned contains SS - 00259 are restricted substances
- 2、The corresponding issued by SGS or ITS icp-aes data Not the material in a list, and validity.

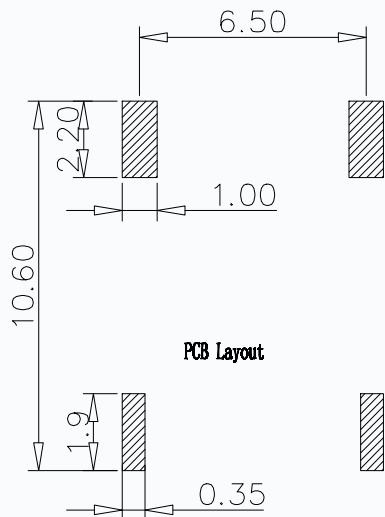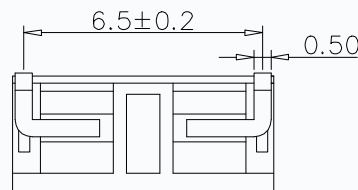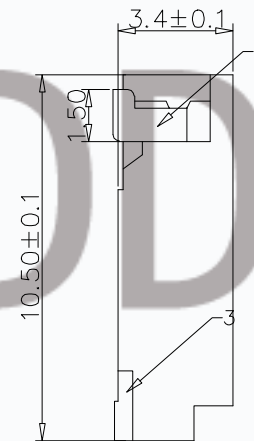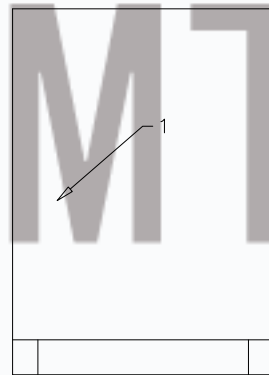

CMTDDZ 东莞市田都科技有限公司 Dongguan TianDu Technology Co., Ltd.		设计	ERIC
尺寸公差	角度公差	品名: T19-BH3.5-2P	审核
.X ±0.25	.X' ±0.1'	图号:	批准
.XX ±0.2	.XX' ±0.05'	单位: mm	比例: --
.XXX ±0.05	.XXX' ±0.005'	页数: 1/1	版本: A1

CMTDDZ