

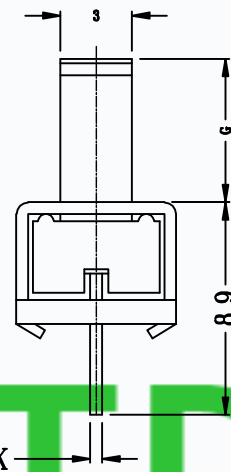
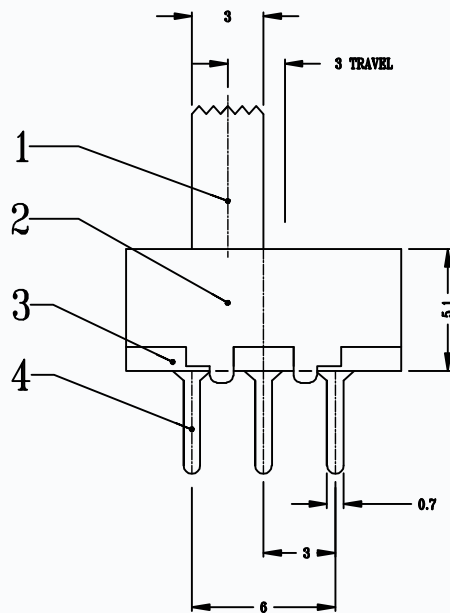






CAD FILE:

MODEL NO.	KNOB(G/VG)
T2-123017-G	(2~15)mm

P.C.B LAYOUT
BOTTOM VIEW

CMTDDZ

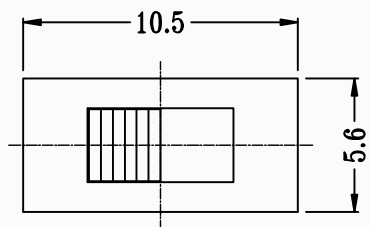

SCHEMATIC (NON-SHORTING)

SPECIFICATIONS

Rating	0.5A 50V DC
CIRCUIT	1P2T
Timing	NON-SHORTING
Travel	3.0mm
Contact Resistance	< 100 mΩ
Operating Force	250gf ± 100gf
Operating Life	10.000 cycles

8					TOLERANCE UNLESS SPECIFIED WITHIN 1.5mm : ±0.1mm OVER 1.5mm : ±0.2mm	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN TIANDU ELECTRONICS CO.,LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN TIANDU ELECTRONICS CO., LTD	DESCRIPTIONS OF REVISION			APPD.			
7													
6	SPRING	STEEL STRIP	1	NATURAL			TITLE : VERTICAL SLIDE SWITCH			UNIT : mm	DRWG NO.: CMTDDZ-T2-123017-00		
5	CONTACT CLIP	PBS STRIP	1	Ag PLATED			MODEL: T2-123017-G			SCALE: 3:1	DWN.	ERIC	2013-6-17
4	TERMINAL	BRASS STRIP	3	Ag PLATED			CMTDDZ 东莞市田都电子有限公司				CHK'D	MAIKO	2013-6-17
3	BASE	PHENOLIC RESIN	1	NATURAL			DONGGUAN TIANDU ELECTRONICS CO.,LTD.				APPD.	Coco	2013-6-17
2	FRAME	STEEL STRIP	1	NI PLATED									
1	KNOB	POM	1	BLACK									
NO.	PARTS	MATERIALS	Q'TY	FINISH									